
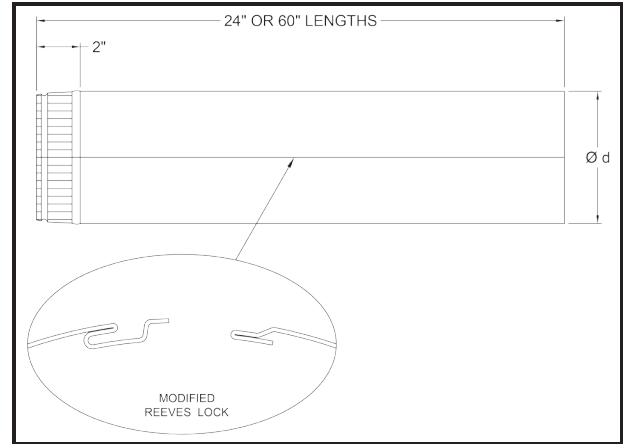


Round Reeves Lock Snap Pipe

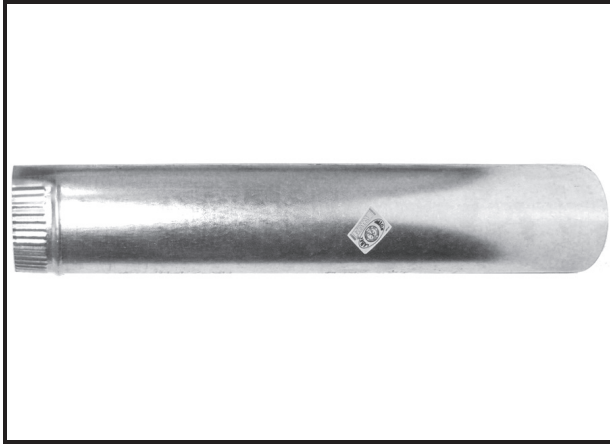

Technical Data	
<ul style="list-style-type: none"> Galvanized Steel (ASTM A653 and A924) G-60 Galvanized Coating (ASTM A653 and ASTM A90) Pressure Rating: -1 w.g. to +2 w.g. 	<ul style="list-style-type: none"> SPR - Reeves Lock Pipe meets SMACNA RL-6A&B Dimensional Tolerance: $\pm 1/4"$

Product Availability						
Size ($\varnothing d$)	24" Lengths	Quantity		60" Lengths	Quantity	
	24 (R)*	Bundle	Skid/Rack	24 (R)*	Bundle	Skid/Rack
16"	Yes	10	60	Yes	5	25
18"	Yes	10	50	Yes	5	20
20"	Yes	10	50	Yes	5	20
22"	‡	‡	‡	‡	‡	‡
24"	‡	‡	‡	‡	‡	‡

*(R) - Reeves Lock unsealed pipe - ONLY (GreenSeam® is not available over 14").
 ‡ Consult factory for availability.

Part Number Schematic					
Example: 60SPR16GA24 = 60" long, 16" round Reeves Lock Snap Pipe in 24Ga. Galvanized Steel					
60 Pipe Length 24 - 2' 0" 60 - 5' 0"	SP Snap Pipe	R Lock Type R - Reeves	16 Pipe Diameter ($\varnothing d$)	GA Material GA-Galvanized	24 Gauge GA: 24

Check with your sales representative for availability of any size, gauge, or specialty metal item not shown here.