



80 Little Falls Road Fairfield, New Jersey
07004

Tel: (973) 575-5120 Fax: (973) 575-5160


Web: www.acudor.com E-mail:

info@acudor.com

ACCESS DOORS - Duct Doors


HD-5070 Description

Acudor Duct Access Doors are designed to provide convenient, economical access to duct components. The insulated door panel, along with the gasketing between the door and frame assures a tight seal without obstruction in the air system. Acudor duct access doors are available in either hinged (**HD-5070**) or double cam (**CD-5080**) construction.

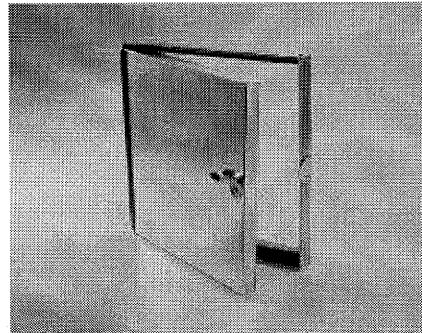

Access Door Specifications

- Door: 24 gage galvanized steel, double panel.
- Frame: 24 gage galvanized steel with 5/8" notched knock over tabs.
- Hinge: Continuous aluminum piano hinge. (HD-5070 only)
- Insulation: Door panel filled with 2" fiberglass insulation (7.7 R factor), compressed into 1".
- Gasketing: 1/8" thick by 1/2" wide closed cell neoprene gasketing between door and frame.
- Latch: Self-tightening, hand operated cam latch.

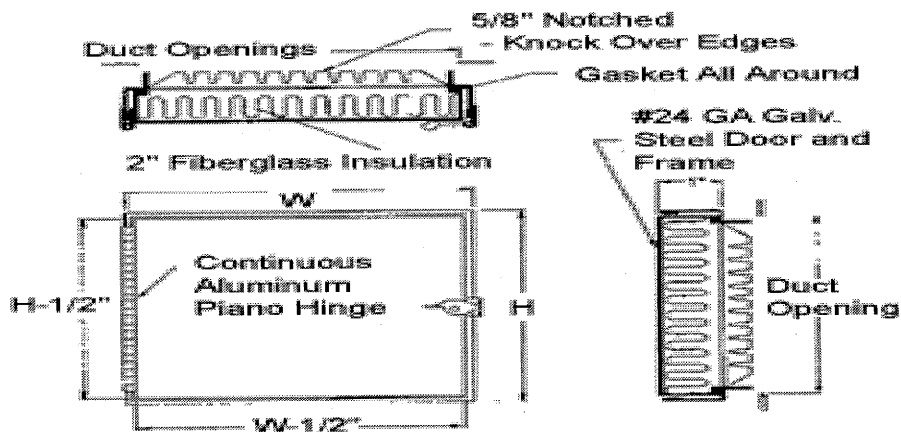

HD-5070

STANDARD SIZE ACCESS DOORS (special sizes available upon request)

NOMINAL DOOR SIZE
W&H

DUCT
OPENING

WEIGHT PER DOOR

INCHES	mm		lbs.	kg.
6x6	150x150	4-3/4x4-3/4	1-1/4	0.6
8x8	200x200	6-3/4x6-3/4	1-3/4	0.8
10x10	250x250	8-3/4x8-3/4	2-3/4	1.3
12x12	300x300	10-3/4x10-3/4	3-3/4	1.7
14x14	350x350	12-3/4x12-3/4	4-3/4	2.2
16x16	400x400	14-3/4x14-3/4	5-1/4	2.4
18x18	450x450	16-3/4x16-3/4	6-3/4	3.1
20x20	500x500	18-3/4x18-3/4	9	4.1
24x24	610x610	22-3/4x22-3/4	12	5.5